

Installation Procedure 5th Generation Camaro Front License Plate Bkt

Top Flight Reproductions
42 Pleasant Street
Stoneham, MA 02180
Phone: 781-279-1279
E-mail: topflightrepro@yahoo.com
www.topflightrepro.com

Installation Procedure for P/N
0010003-5 Permanent Bracket



Front Plate & Bkt without Frame



Top Flight Reproductions
Front License Plate Mtg Bkt



Plate with GM Colored Frame
(Frame is Available at Additional cost)

Step 1: Do not install bracket at temperatures below 60 degrees F. Clean area with alcohol wipe (supplied with bracket kit) where bracket is to be mounted. The surface on the front of the bumper is to be clean and dry and surface temperature to be 60 degrees or above prior to installation.

Step 2: Practice, dry run. Do not remove release liner from the adhesive strips. Position bracket, lining up the center mark on the face of the bracket to the center line of the front bumper, see figures 1 and 2. Holding the bracket with both hands and with your thumbs on the face of the bracket and your index fingers on the back side of the bracket for vertical positioning.

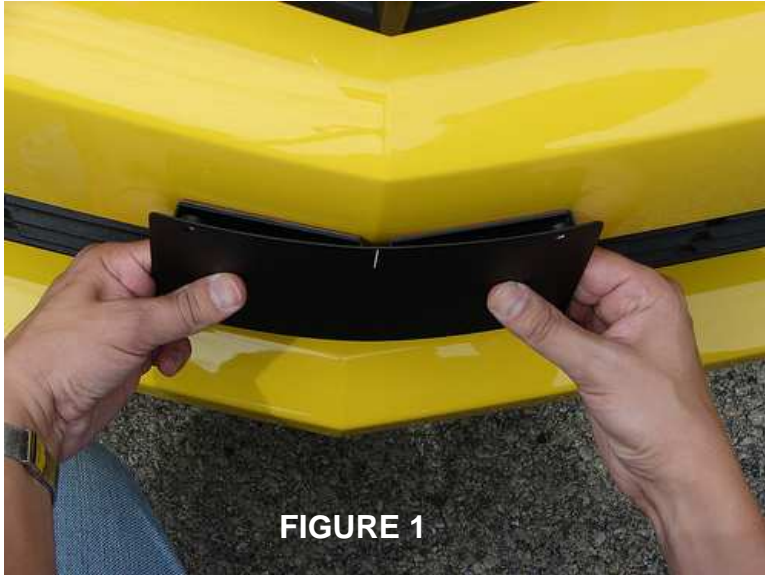


FIGURE 1



FIGURE 2


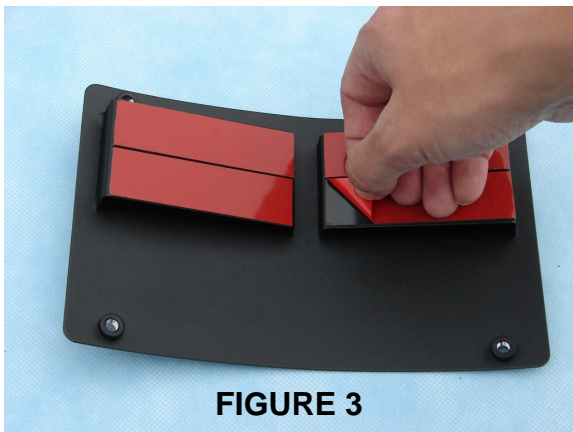


FIGURE 3

Step 3: Remove the release liner from the 4 adhesive strips, see figure 3 and repeat step 2, carefully positioning the bracket forward while keeping it centered making light contact with the face of the front bumper. Do not apply a lot of force at this time in case you need to make a minor adjustment. When satisfied with placement, continue to step 4.

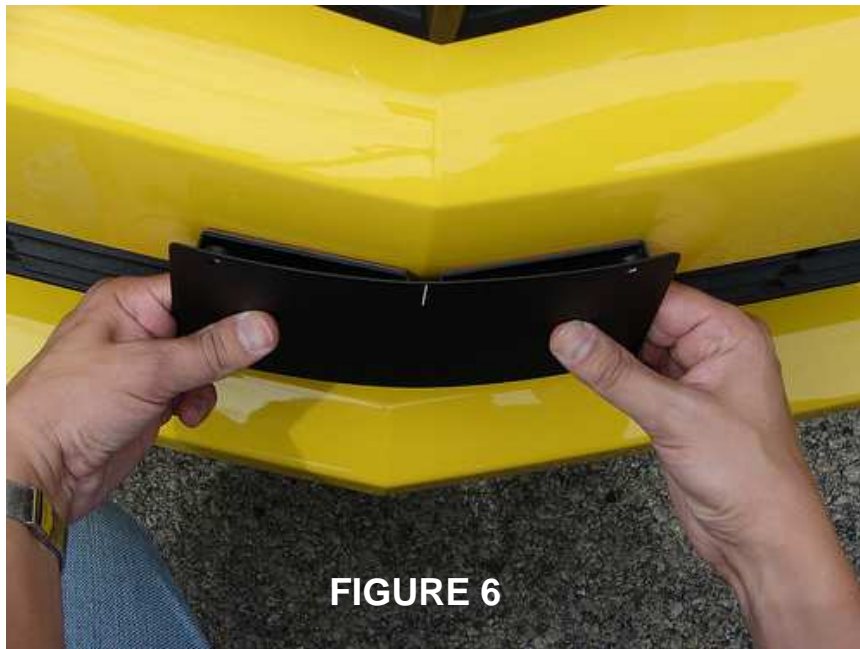

Step 4: The bracket is now attached to the front bumper. **To ensure good adhesive contact with the face of the bumper, apply heavy forward pressure, see figures 4, 5 and 6, the full length of the bracket working from left to right for approximately 5 minutes. Wait approximately 1 hour before performing step 5.**



FIGURE 7



FIGURE 8



FIGURE 9

Step 5: It is not necessary to pre-bend the license plate. Install the license plate using 1/4-20 x 3/8 stainless steel Phillips pan head screws and split lock washers, (4 places supplied with bracket kit) starting from the left side, top and bottom then push the license plate on the right side to conform to the curvature of the bracket and screw the right side down, top and bottom. Your front license plate assembly should look like figures 7, 8 and 9.

Disclaimer

- **Top Flight Reproductions assumes no liability for damage to the car when installing the bracket Part Number 0010003-5 or damages due to contact with another object, automated car wash or vandalism after installation.**
- **The purchaser assumes all responsibility for the placement and attachment of the license plate bracket.**

**Top Flight Reproductions
42 Pleasant Street
Stoneham, MA 02180
Phone: 781-279-1279
E-mail: topflightrepro@yahoo.com
www.topflightrepro.com**